

FIG. 1

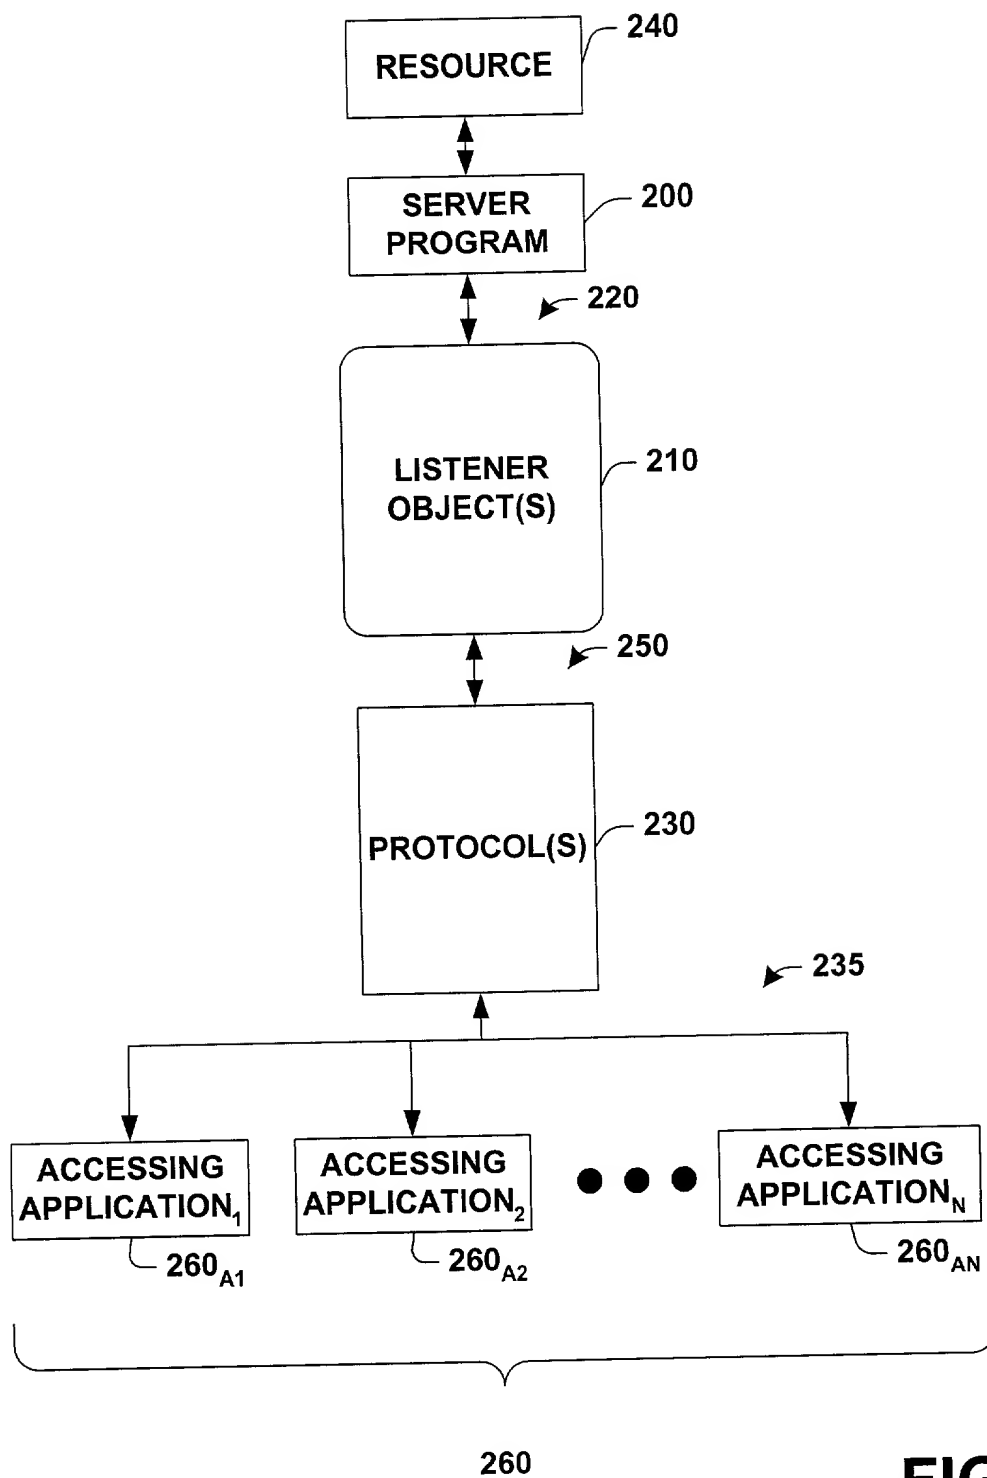


FIG. 2

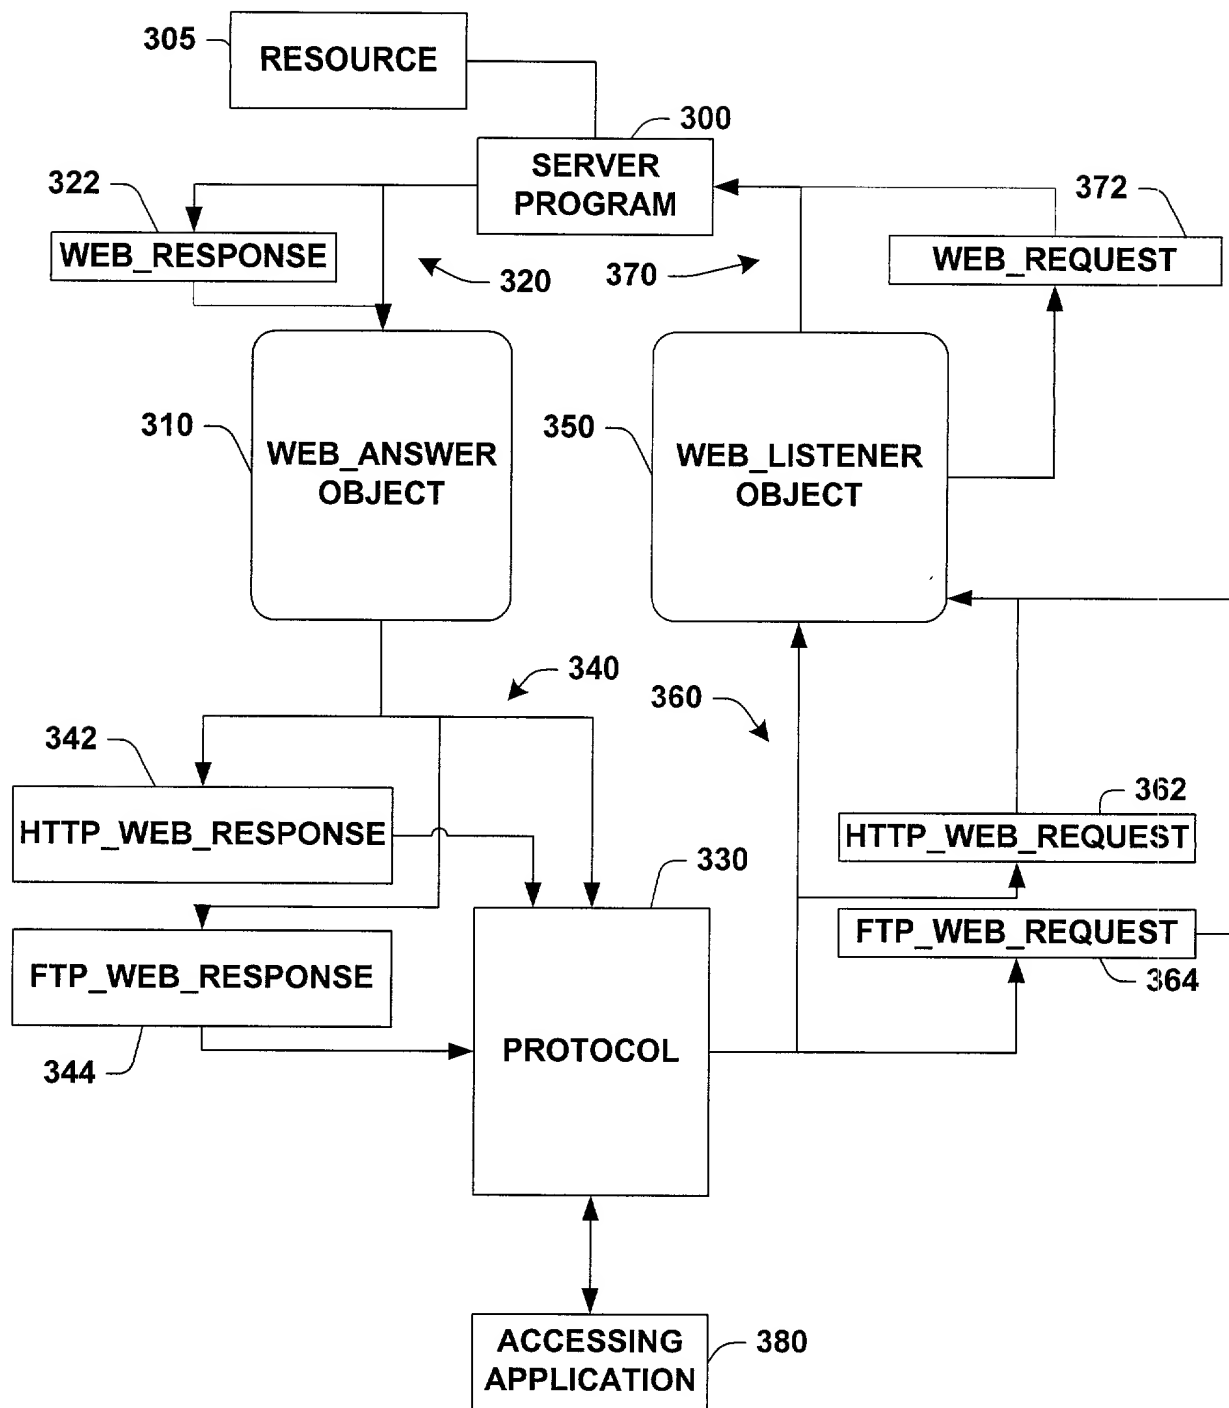


FIG. 3

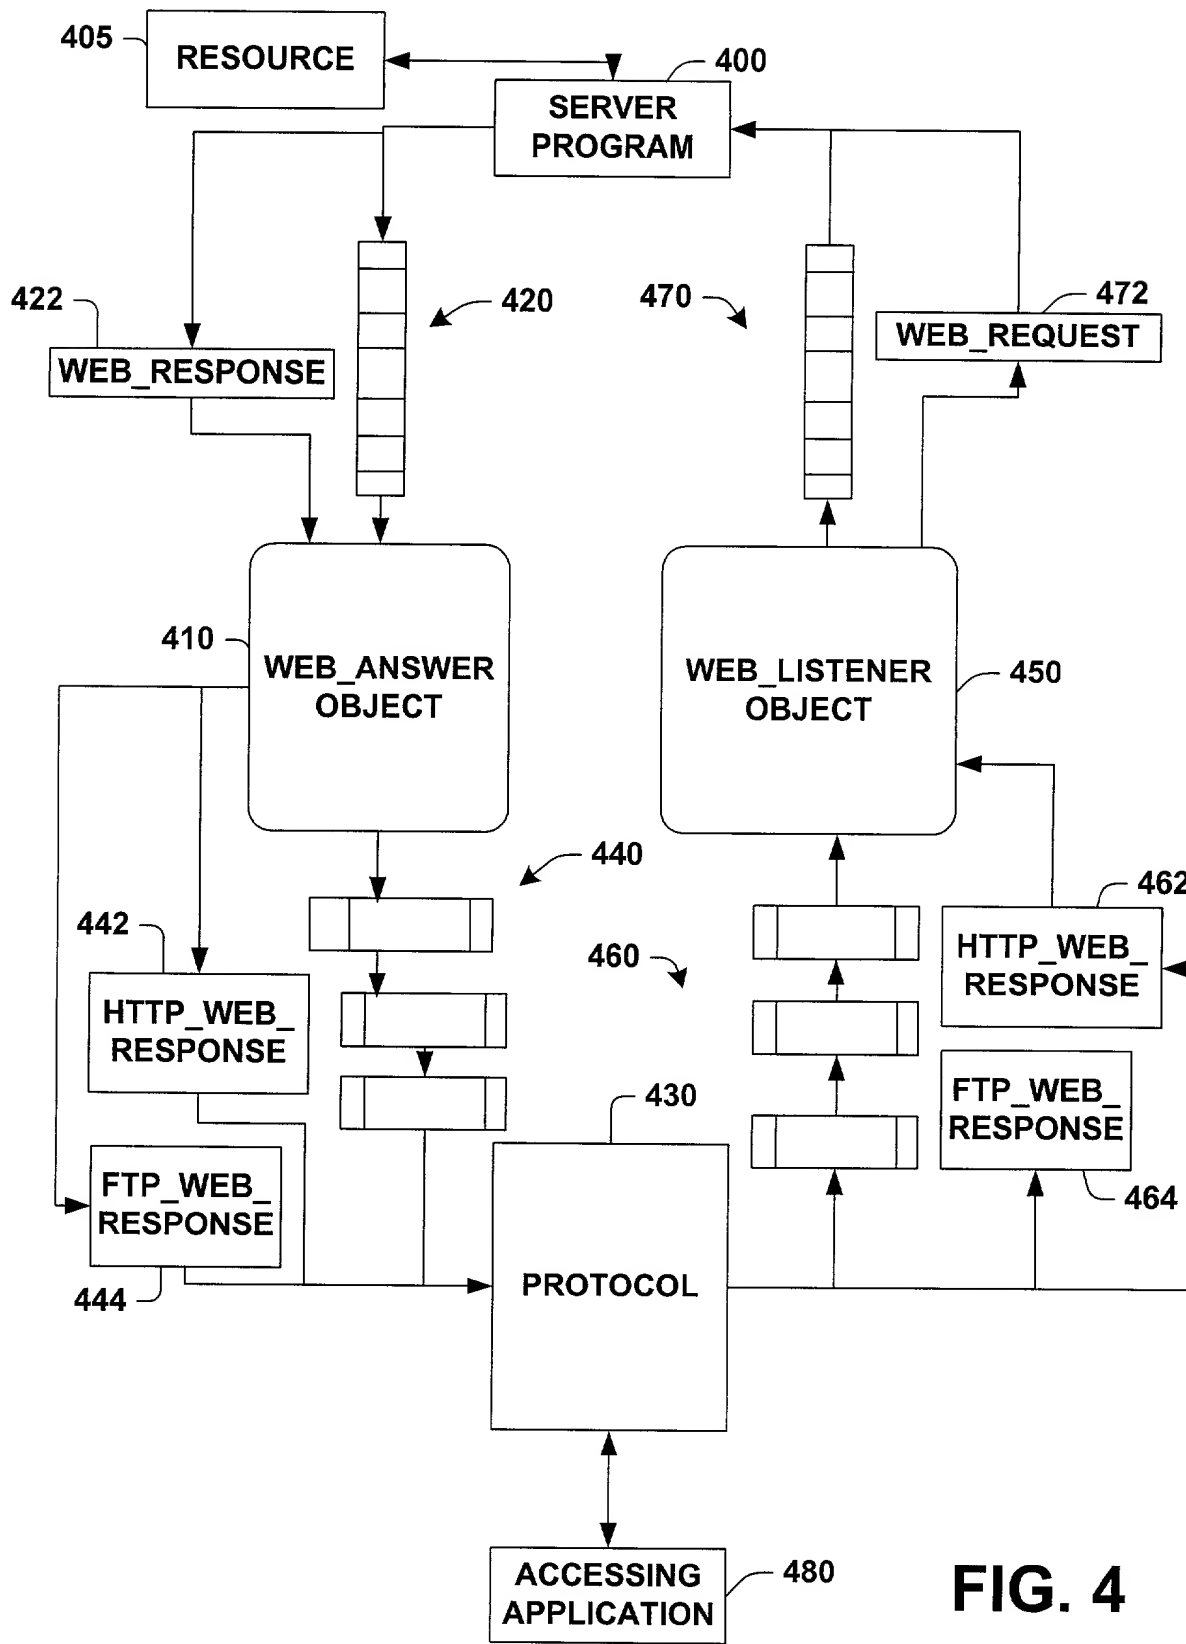


FIG. 4

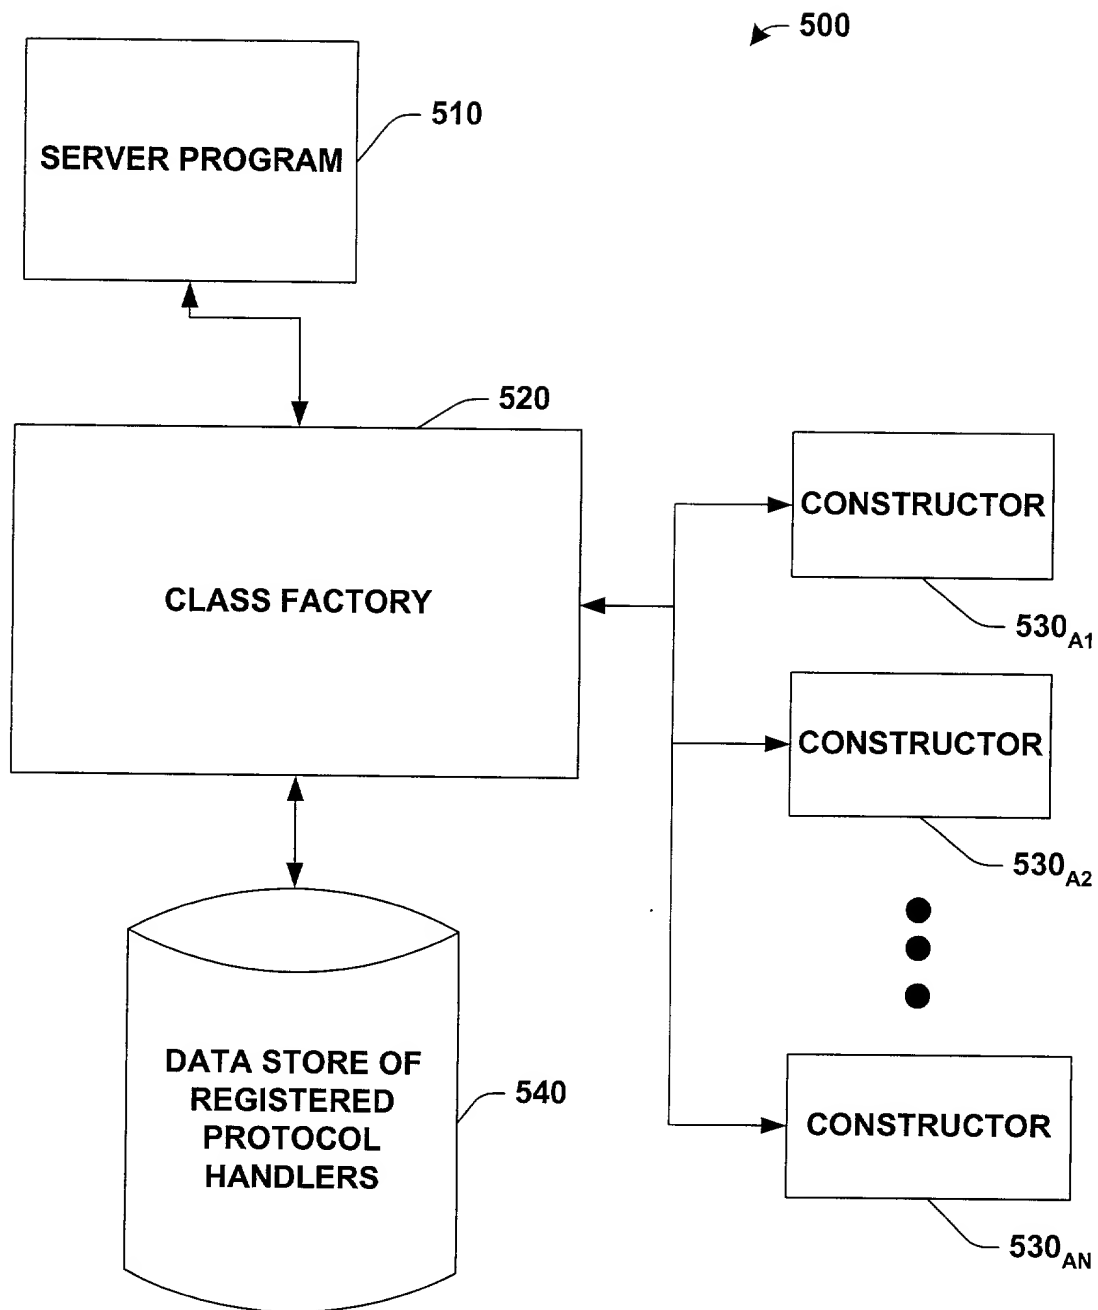


FIG. 5

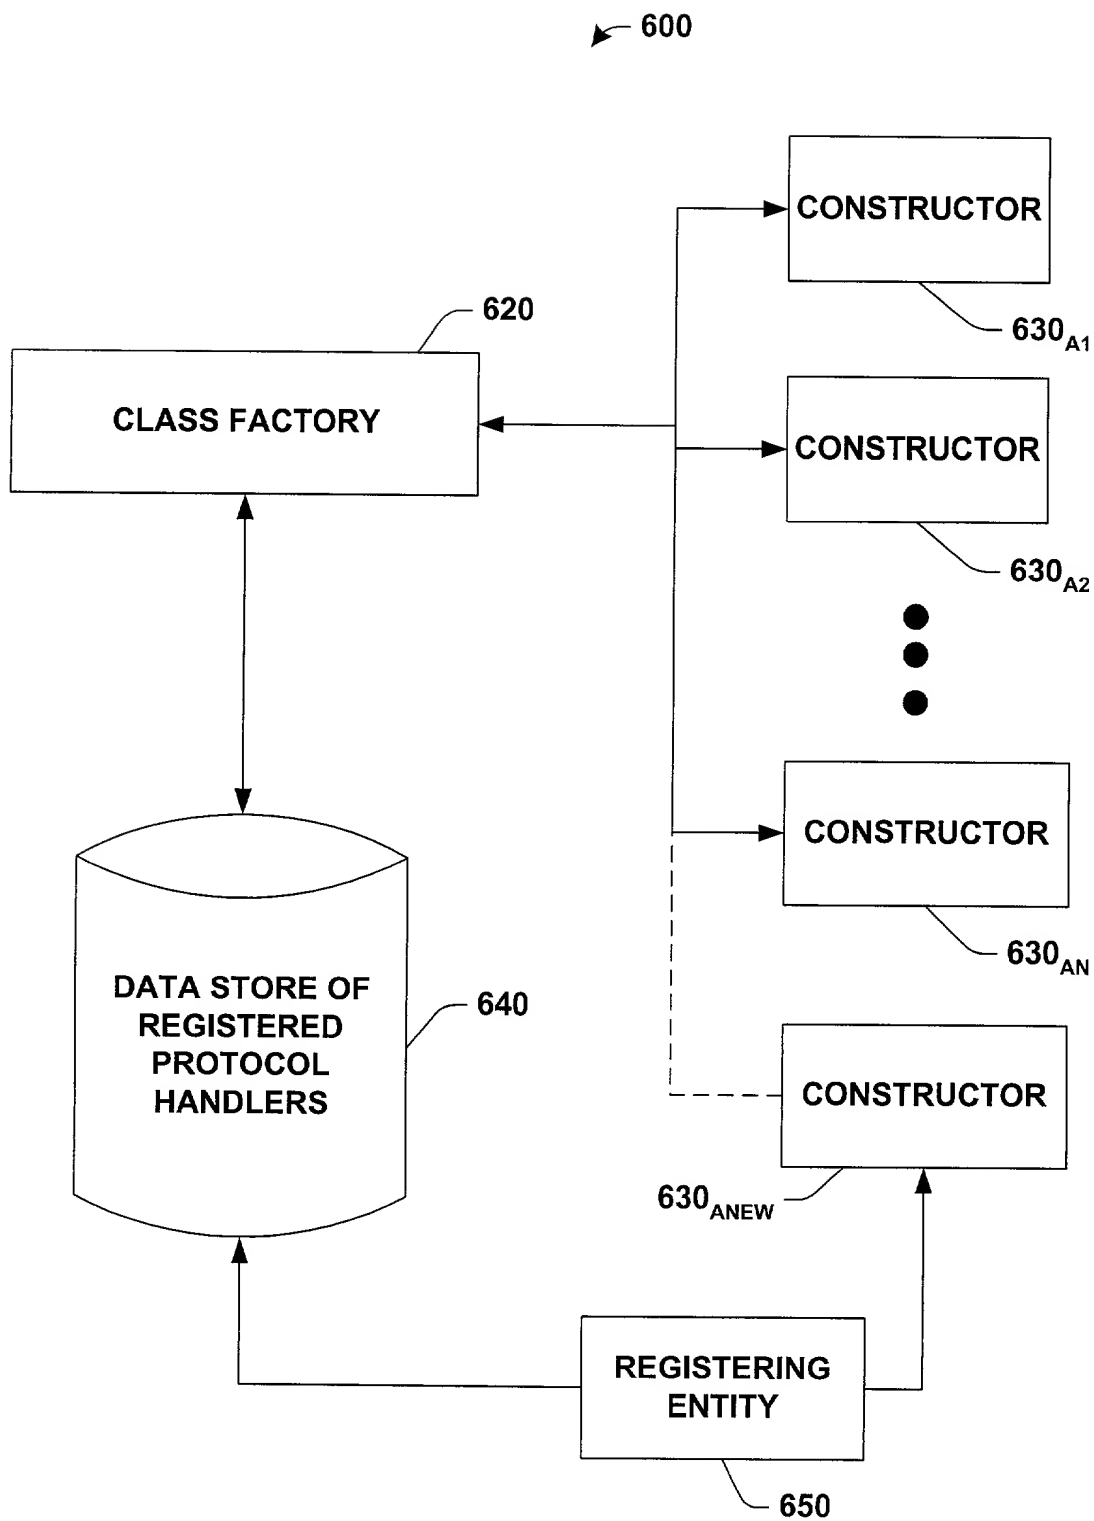


FIG. 6

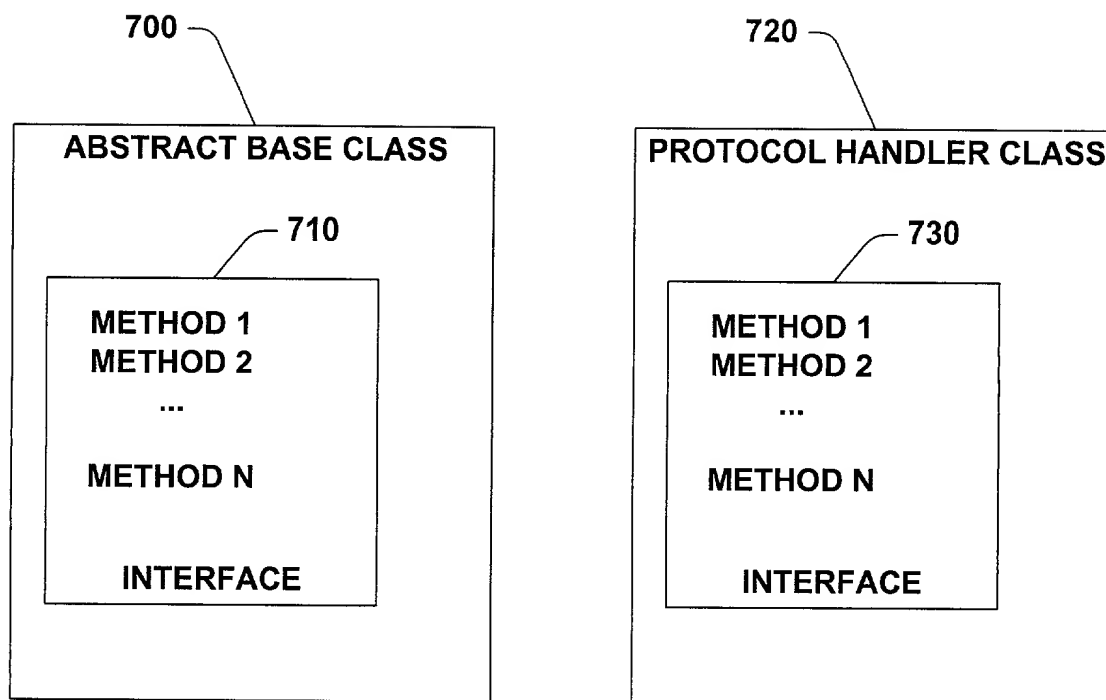


FIG. 7

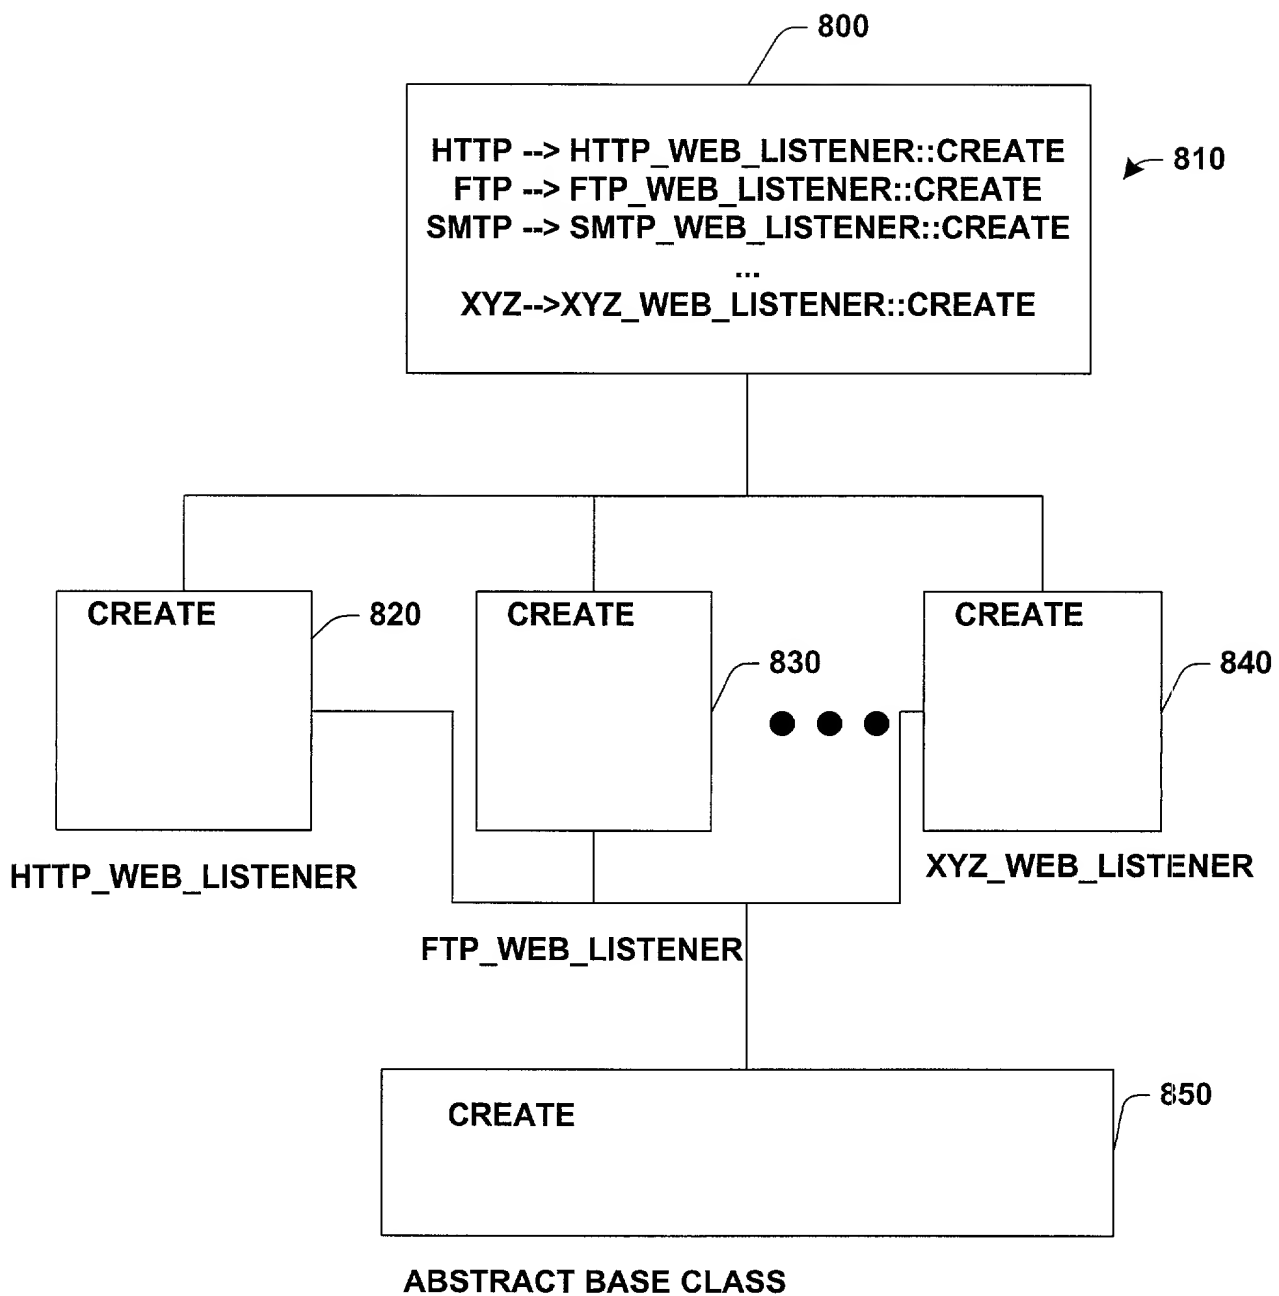


FIG. 8

900

PROPERTIES

URI_LIST


METHODS

ADD_URI_PREFIX(STRING)
REMOVE_URI_PREFIX(STRING)
REMOVE_ALL()
GET_REQUEST() RETURNS WEB_REQUEST
BEGIN_GET_REQUEST(CALLBACK_FUNCTION)
END_GET_REQUEST()

CLASS WEB_LISTENER

FIG. 9

FIG. 10 is a diagram of a class structure for a web answer object. The class is named CLASS WEB_ANSWER and contains two sections: PROPERTIES and METHODS. The PROPERTIES section lists five attributes: STATUS, STATUS_DESCRIPTION, CONTENT_LENGTH, CONTENT_TYPE, and RESPONSE_URI. The METHODS section lists one method: ANSWER(CONTENT, CONTENT_LENGTH, CONTENT_TYPE, STATUS, STATUS_DESCRIPTION, RESPONSE_URI);.

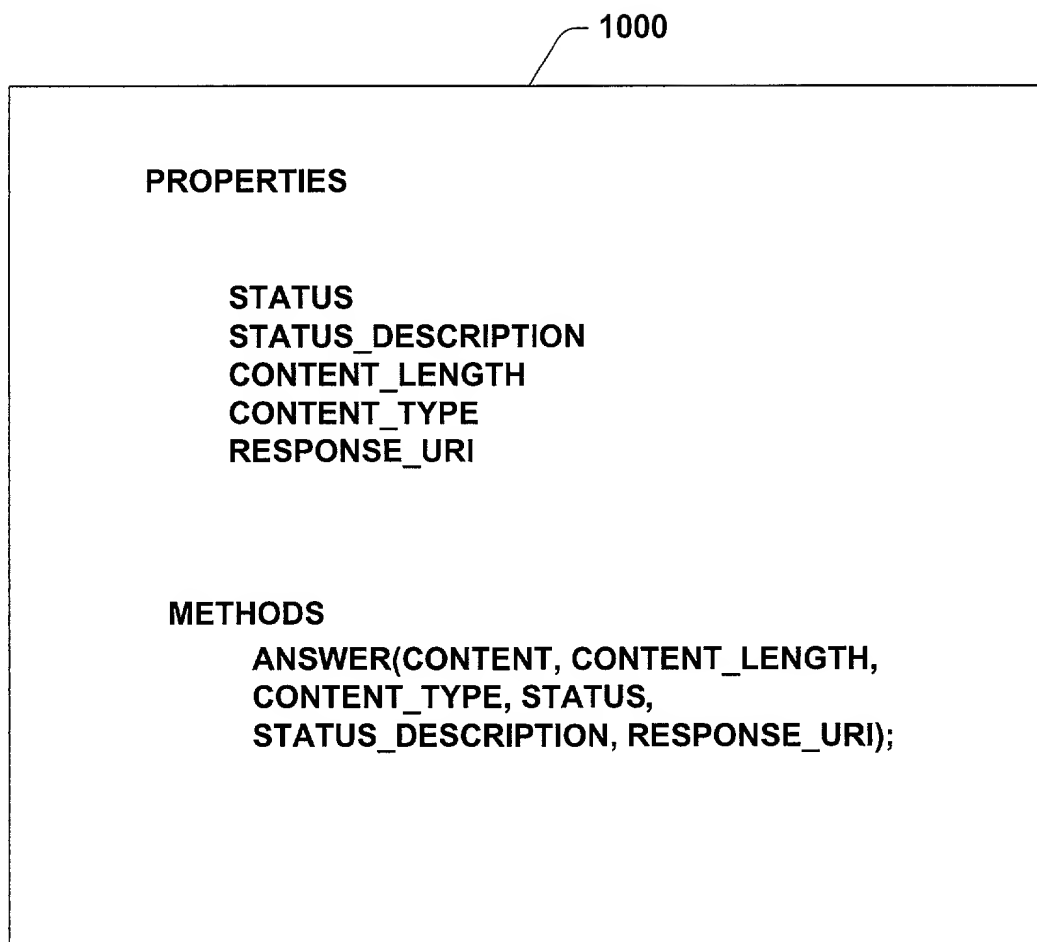

CLASS WEB_ANSWER

FIG. 10

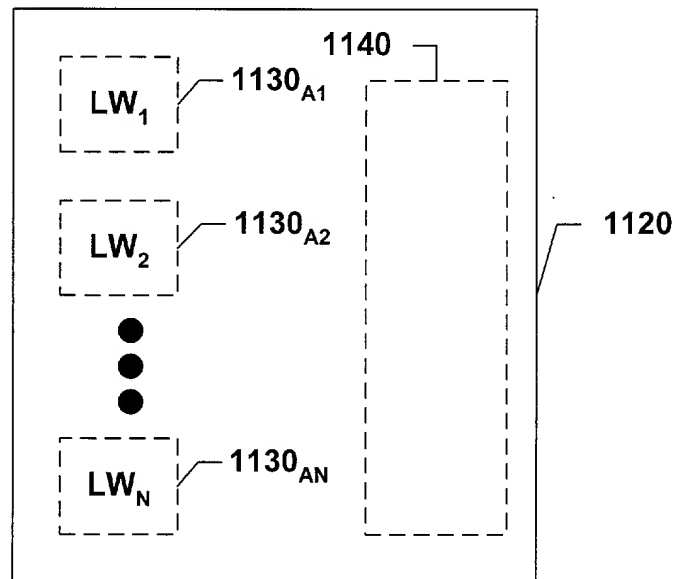
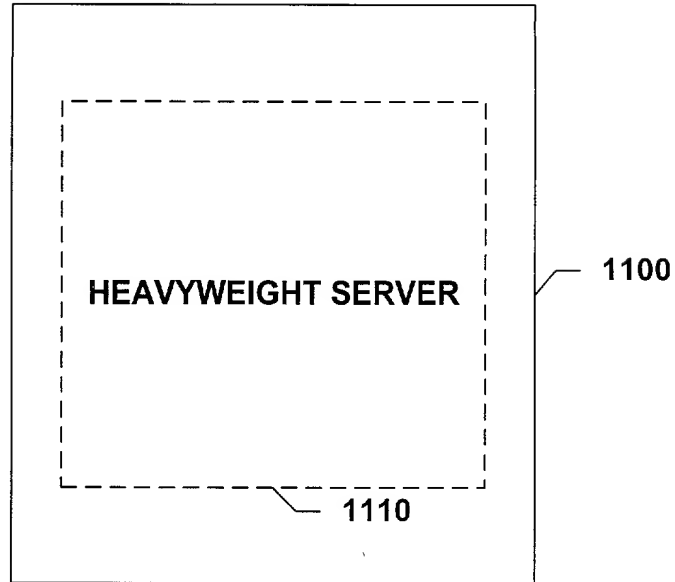


FIG. 11

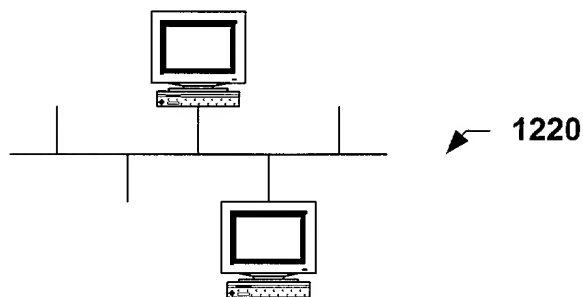
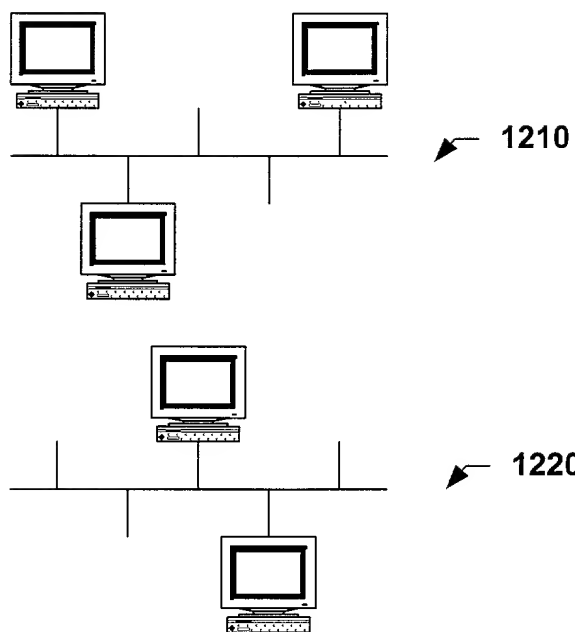
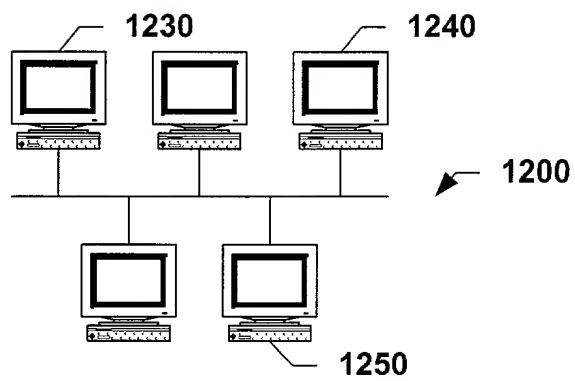


FIG. 12

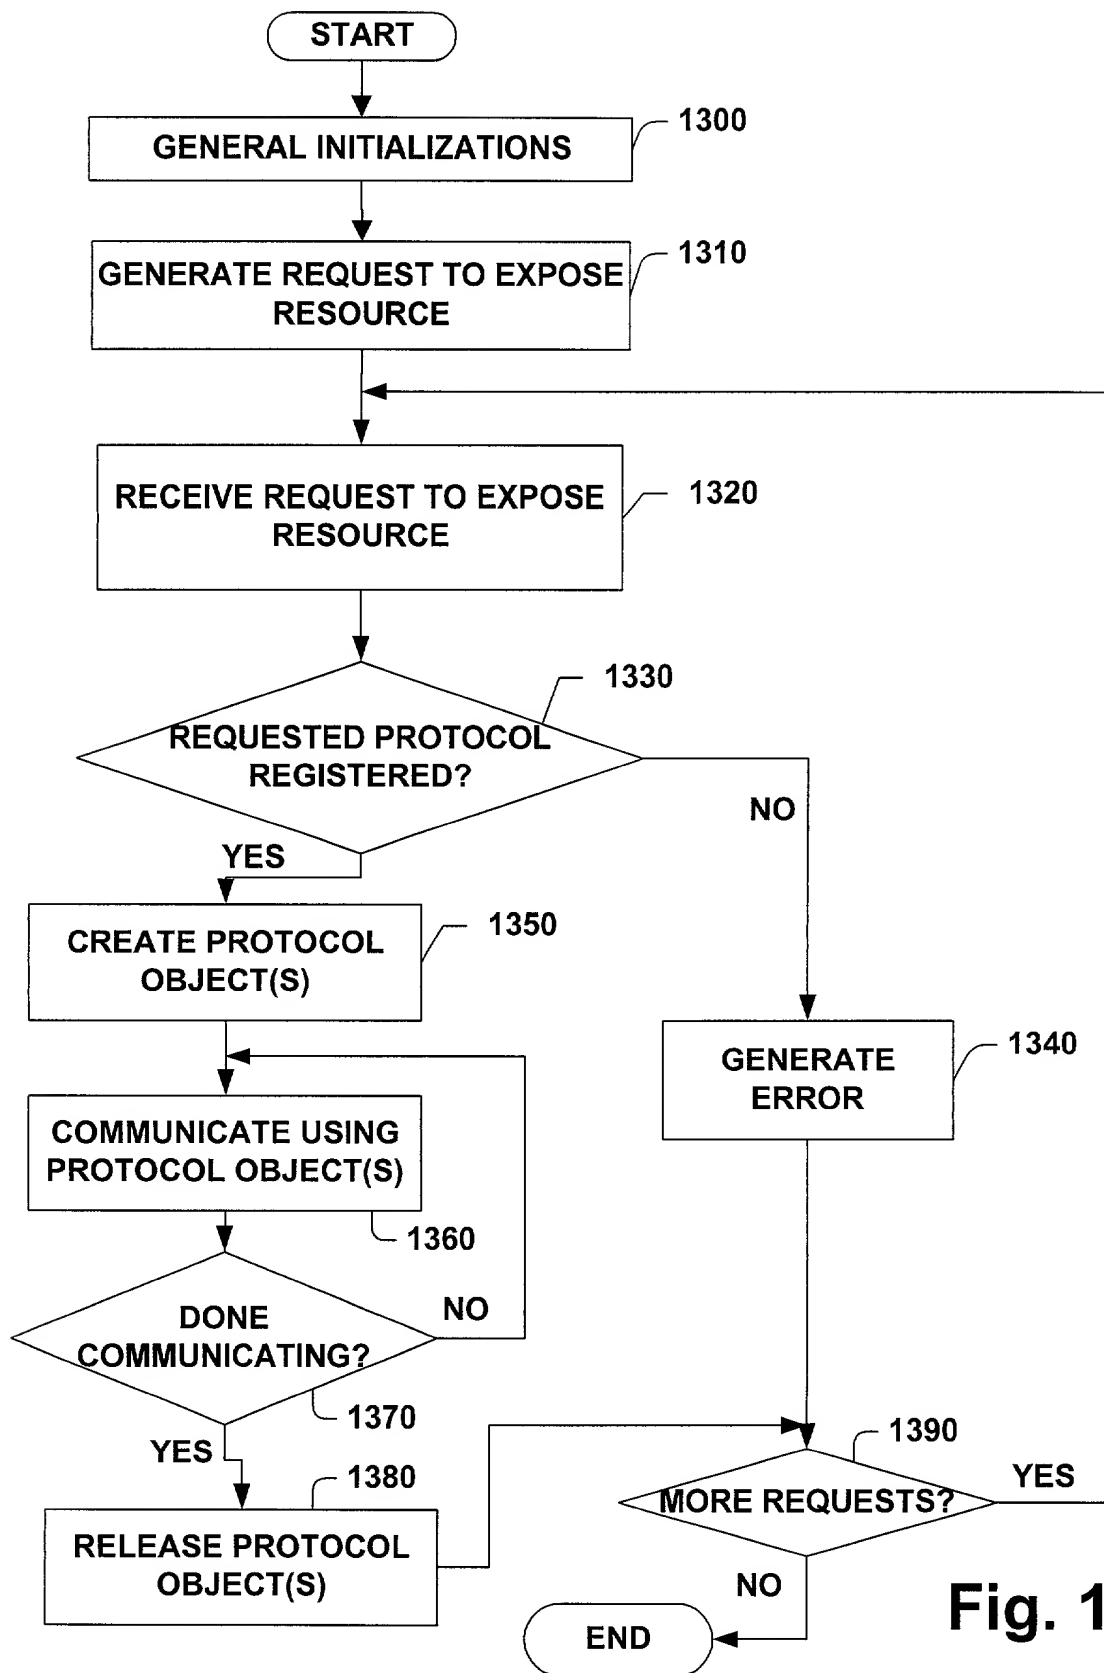


Fig. 13

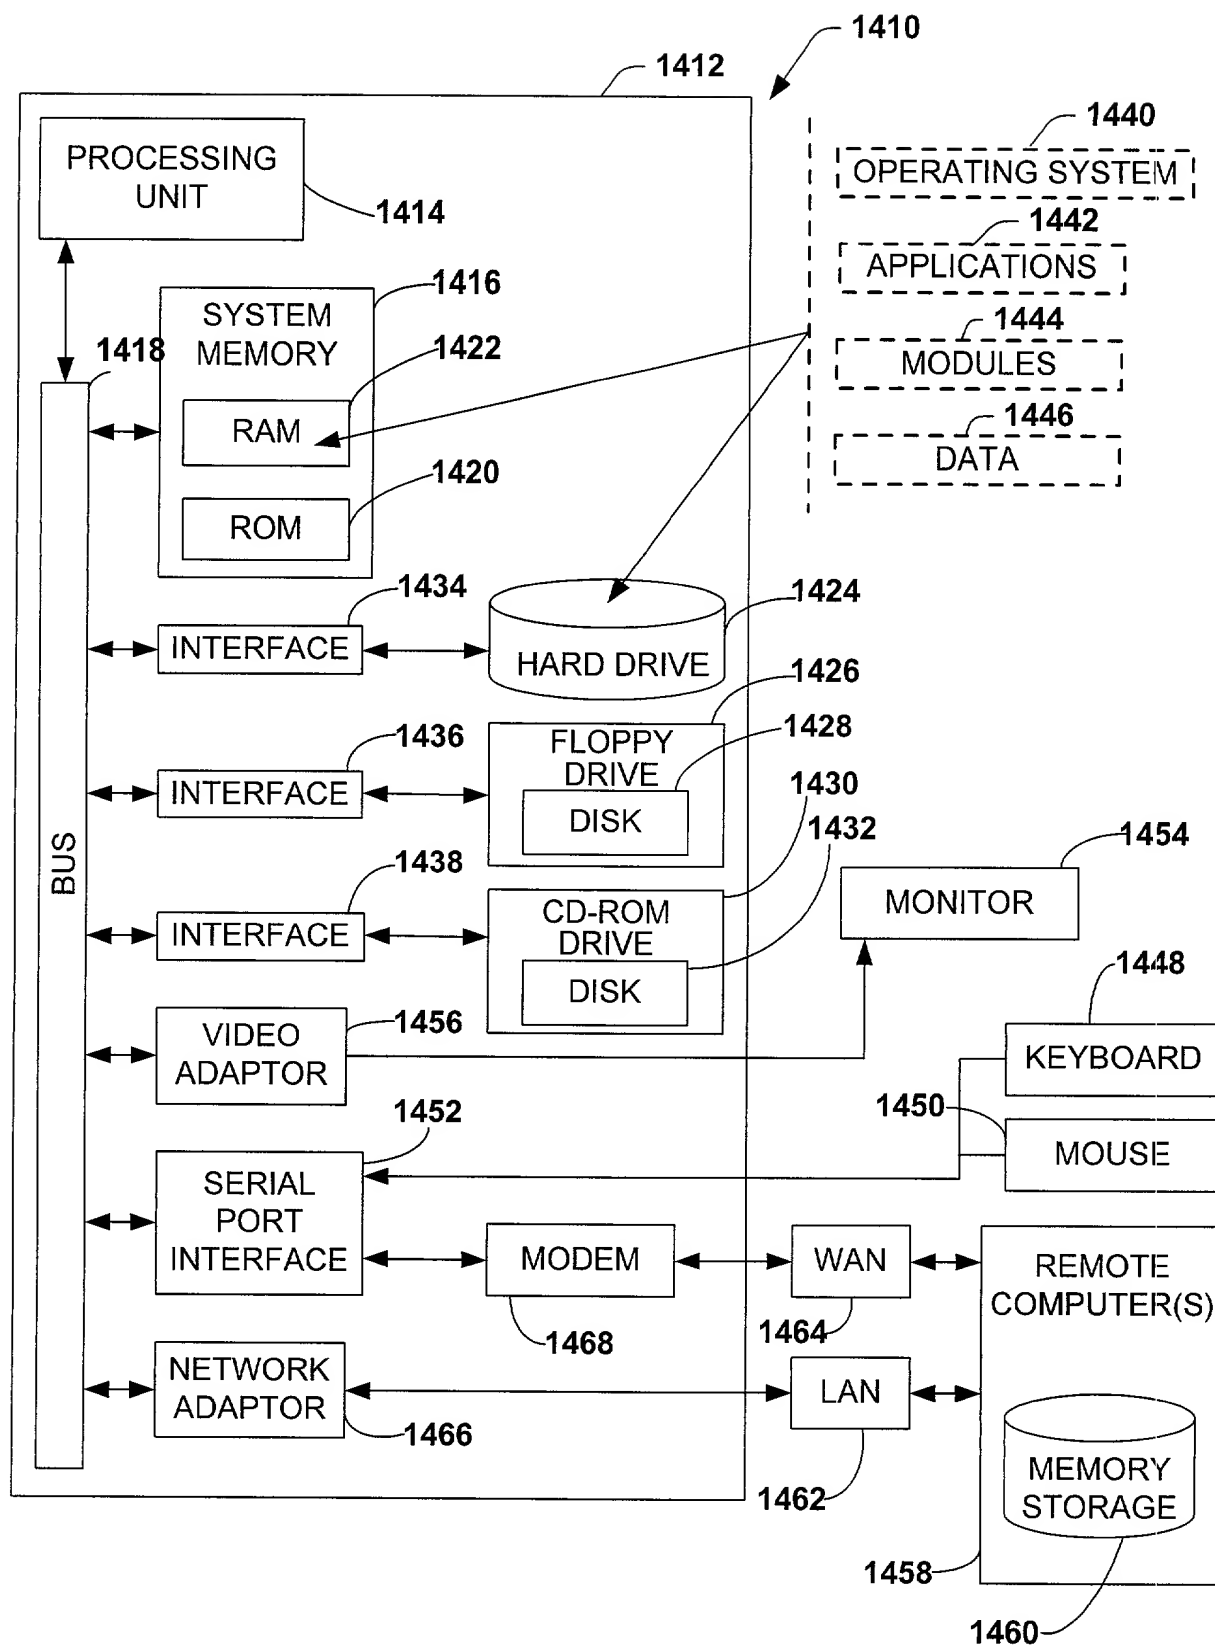


FIG. 14